


- Machine Taps
- Maschinen-Gewindebohrer
- Machinetappen
- Tarauds machine
- Machos de máquina
- Macho de Máquina

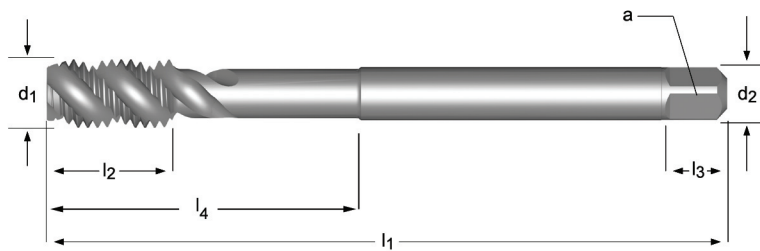

E605

M HSCo ISO 2283 6H 2xD C 2-3 40°

- 1.2 1.3 1.4 1.5 2.1 2.2 2.3 5.2 7.1 7.2 7.3 7.4

M	P mm	l_1 mm	l_2 mm	d_2 Ø mm	\square a mm	l_3 mm	z		l_4 mm	e-Code
3	0,50	66	8	3,15	2,50	5	2	2.5	22	E605M3
4	0,70	73	9	4,00	3,15	6	2	3.3	25	E605M4
5	0,80	79	11	5,00	4,00	7	3	4.2	29	E605M5
6	1,00	89	13	6,30	5,00	8	3	5	37	E605M6
8	1,25	97	22	6,30	5,00	8	3	6.8		E605M8
10	1,50	108	24	8,00	6,30	9	3	8.5		E605M10
12	1,75	119	29	9,00	7,10	10	3	10.3		E605M12
14	2,00	127	30	11,20	9,00	12	3	12		E605M14
16	2,00	137	32	12,50	10,00	13	3	14		E605M16
20	2,50	149	37	14,00	11,20	14	3	17.5		E605M20