


EX006H

• Spectrum™ 机用丝锥

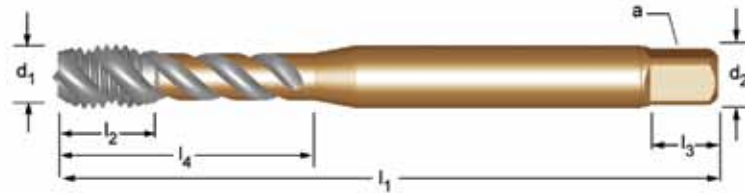

NEW

2010.02

spectrum™

DIN

EX006H



■ 1.1 1.2 1.3 1.4 1.5 7.1 7.2 7.3 7.4

● 4.1 4.2 5.1 5.2

M	P mm	l ₁ mm	l ₂ mm	d ₂ Ø mm	a mm	l ₃ mm	z		l ₄ mm	e-Code
2	0.40	45	4	2.8	2.1	5	3	1.6	9	EX00M2 ¹⁾
2.5	0.45	50	4	2.8	2.1	5	3	2.05	12.5	EX00M2.5 ¹⁾
3	0.50	56	6	3.5	2.7	6	3	2.5	18	EX00M3
3.5	0.60	56	7	4.0	3.0	6	3	2.9	20	EX00M3.5
4	0.70	63	7	4.5	3.4	6	3	3.3	21	EX00M4
5	0.80	70	8	6.0	4.9	8	3	4.2	25	EX00M5
6	1.00	80	10	6.0	4.9	8	3	5	31	EX00M6
6	1.00	80	10	4.5	3.4	6	3	5		EX00M6DIN376
7	1.00	80	10	7.0	5.5	8	3	6	31	EX00M7
8	1.25	90	12	8.0	6.2	9	3	6.8	35	EX00M8
8	1.25	90	13	6.0	4.9	8	3	6.8		EX00M8DIN376
10	1.50	100	15	10.0	8.0	11	3	8.5	39	EX00M10
10	1.50	100	15	7.0	5.5	8	3	8.5		EX00M10DIN376
12	1.75	110	16	9.0	7.0	10	3	10.3		EX00M12
14	2.00	110	20	11.0	9.0	12	3	12		EX00M14
16	2.00	110	20	12.0	9.0	12	4	14		EX00M16
18	2.50	125	25	14.0	11.0	14	4	15.5		EX00M18 ¹⁾
20	2.50	140	25	16.0	12.0	15	4	17.5		EX00M20 ¹⁾
22	2.50	140	25	18.0	14.5	17	4	19.5		EX00M22 ¹⁾
24	3.00	160	30	18.0	14.5	17	4	21		EX00M24 ¹⁾
27	3.00	160	30	20.0	16.0	19	4	24		EX00M27 ¹⁾
30	3.50	180	36	22.0	18.0	21	4	26.5		EX00M30 ¹⁾
33	3.50	180	36	25.0	20.0	23	4	29.5		EX00M33 ¹⁾
36	4.00	200	40	28.0	22.0	25	4	32		EX00M36 ¹⁾
39	4.00	200	40	32.0	24.0	27	4	35		EX00M39 ¹⁾
42	4.50	200	45	32.0	24.0	27	4	37.5		EX00M42 ¹⁾
48	5.00	250	50	36.0	29.0	32	4	43		EX00M48 ¹⁾
52	5.00	250	50	40.0	32.0	35	5	47		EX00M52 ¹⁾
56	5.50	250	55	40.0	32.0	35	5	50.5		EX00M56 ¹⁾
64	6.00	315	60	50.0	39.0	42	6	58		EX00M64 ¹⁾

¹⁾ HSCo